


**BRYNE
WINCH**
Solution AS

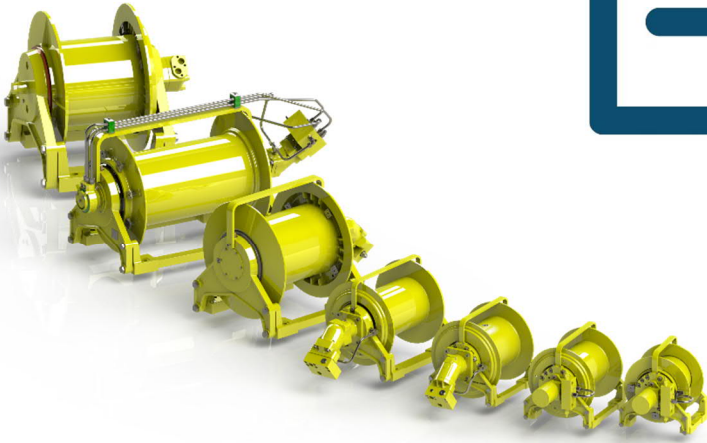

PULLING WINCHES

Reliability and low maintenance have since the early eighties been the hallmark of the Bryne Winches.

Pulling winches used for cargo securing, military vehicles, rescue vehicles, drilling rigs etc.

T05, T10, T15 and T30

		T05*	T10*	T15	T30*
SWL (PULLING)	[Ton]	4t - 5t	6t - 10t	12t - 15t	25t - 30t
Speed	[m/min]	40 - 35	15	15 - 13	11 - 9
Oil flow	[l/m]	106 - 120	90 - 110	115 - 120	175 - 180
Start pressure	[bar]	195	130 - 175	200 - 220	205 - 195
Drum capacity	[m]	52,5(ø12) - 46(ø14)	61(ø15) - 50(ø19)	66,5(ø22) - 55(ø25)	55(ø30) - 52(ø32)
No. of layers		3	3	3	3
Weight	[kg]	110	200	430	600

More detailed data will follow in datasheet if requested

*Possible with manual disconnection of drum