


**BRYNE
WINCH**
Solution AS

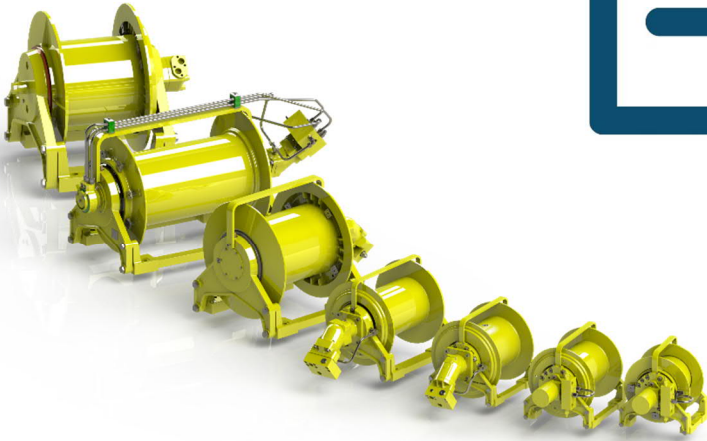

STANDARD HOISTING WINCHES

Reliability and low maintenance have since the early eighties been the hallmark of the Bryne Winches.

Hoisting winches **Type Approval Certificate TAS0000258** with type designation(s)

H02, H03, H04, H07 and H12
is found to comply with

DNVGL-OS-E101
Drilling facilities

DNV GL standard DNVGL-ST-0378
Standard for offshore and platform lifting appliances

DNV GL standard DNVGL-ST-0377
Standard for shipboard lifting appliances

		H02*	H03	H04	H07**	H12
SWL	[Ton]	0,5t - 2t	2t - 3t	3t - 4t	5t - 7t	8t - 12t
Speed	[m/min]	50 - 35	50	40	40 - 25	30 - 20
Oil flow	[l/m]	46 - 65	55 - 110	6 - 115	110 - 120	110
Start pressure	[bar]	~140	220 - 180	250 - 180	235 - 185	225 - 290
Drum capacity	[m]	62,5(ø10) - 57(ø11)	53,5(ø13) - 50(ø14)	65,5(ø14) - 61,5(ø15)	72(ø20)	73(ø22) - 65(ø25)
No. of layers		3	3	3	3	3
Weight	[kg]	110	140	180	380	670

More detailed data will follow in datasheet if requested

*H02 - can be delivered as Short type with wire capacity 32m(ø11) and weight of 95 kg

**H07 - can be delivered as Long type with wire capacity 115m(ø20) and weight of 440 kg